

EVOLUX®
LUXURY EVOLVING



Iris Swirled Hickory 7"x48"

Exclusively stocked at:



IRIS 5mm

7"x48" | 20 mil | Rigid Core

Iris 5mm

Bright and inviting, the Iris Series mirrors the light, natural tones of softwood, infusing spaces with an airy and open ambiance.



Iris Beach Walk 7"x48"



Iris Swirled Hickory 7"x48"

Iris 5mm

Rigid Core Click Floating

 5.0 mm

7"x48"

18x122 cm

20 mil - Wood Embossed

 DIAMOND LUX FINISH

 FAMILY SAFE

 PET FRIENDLY

 SCRATCH RESISTANT

 STAIN RESISTANT

 EASY TO CLEAN

 UNILIN CLICK TECHNOLOGY

IXPE Pad Attached



Beach Walk

7"x48"



Swirled Hickory

7"x48"

100% WATERPROOF



*Coordinating Trims Available:



T-Mold 94" x 1-3/4"



Reducer 94" x 1-3/4"



Stair Nose 94" x 2" x 3/4"



End Cap 94" x 1-1/2"



Quarter Round 94" x 1-1/2"



Iris Vanilla Cream 7"x48"

Iris

Rigid Core Click Floating

5.0 mm

7"x48"
18x122 cm

20 mil - Wood Embossed



IXPE Pad Attached




Vanilla Cream



7"x48"



Iris Shadow Grey 7"x48"

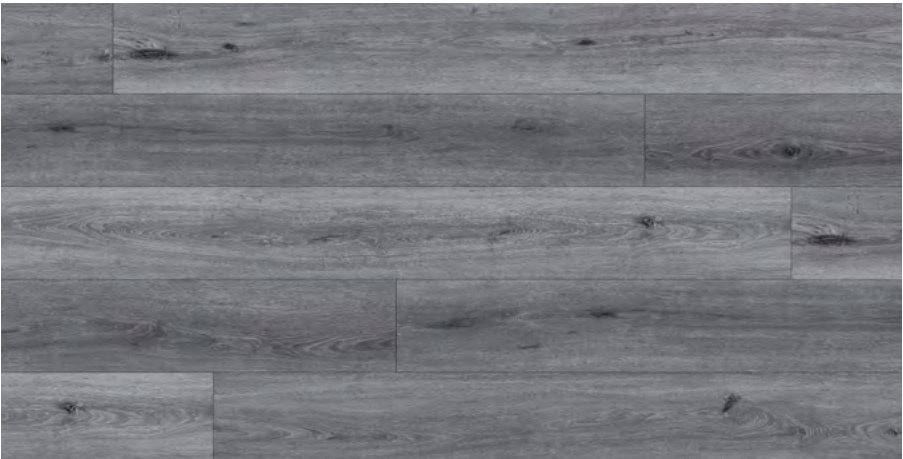

Shadow Grey



7"x48"



100% WATERPROOF

*Coordinating Trims Available:



T-Mold 94" x 1-3/4"



Reducer 94" x 1-3/4"



Stair Nose 94" x 2" x 3/4"



End Cap 94" x 1-1/2"



Quarter Round 94" x 1-1/2"

INSTALLATION

LVP floors can be installed using several methods, depending on the type of product.

Here are some common installation methods:

Click-lock Installation:

Some luxury vinyl plank floors feature a click-lock system that allows the planks to be securely snapped together without adhesive. This method offers additional locking mechanisms for a tighter fit. Click-lock installation is fast and easy and provides a strong, stable result. UNILIN Locking system. Angle / Angle.

CARE

EVERYDAY CLEANING OF EVOLUX

Low maintenance and easy cleaning are two of the key advantages of having Evolux products on your floors. After installation, you should not clean the area or move furniture into it until the adhesive has completely dried for Glue down products. With Click floating installs you can move right in immediately.

- Take these easy daily cleaning procedures to maintain the best-looking floor:
- To get rid of dirt or grit, sweep or vacuum your floors.
- Damp mop with a pH neutral cleaner approved to use with vinyl floors.
- Routine maintenance with will effectively kill and remove germs on the floor’s surface.
- Allow your floor to dry completely before walking on it.
- Think about the following advice to maintain the best possible condition for your LVT flooring:
- Lift Furniture Entirely: Always raise heavy furniture completely off the ground when moving it. Your LVT flooring may get dents and scratches from dragging furniture.
- Make Use of Furniture Pads Underneath the legs of heavy furniture such as tables and chairs, place felt protection or furniture pads. By preventing furniture from coming into close touch with the floor, these pads lower the possibility of damage.

Area Rugs and Mats:

Place area rugs or mats in places that get a lot of foot traffic. They serve as a buffer, preventing furniture movement and foot activity from scratching and scuffing your LVT.

WARRANTY

WHAT THE WARRANTY COVERS?

Manufacturing Defects: EvoLux Floors ensures that the floating click product will be free from any manufacturing defects during the period of this warranty Wear: EvoLux Floors ensures that during the period of the warranty, wear due to normal foot traffic will not change the visual aspects of the product.

Product	Format	Residential	Commercial
Iris 5mm	20 mil SPC - floating/ click	Limited Lifetime	15 years

Technical Specifications - Rigid Core

Iris 5mm Rigid Core - 20 mil		
	Standard	Result
Thickness		5.0mm
Size		7"x48"
Material		SPC
Wear Layer		20 mil
Surface Treatment		Diamond Lux Finish - Anti-stain, Extra Scratch Resistance and anti microbial
Surface Texture		Wood Emboss
Padding		1mm IXPE
Warranty	Commercial / Residential	15 year Commercial / Limited Lifetime Residential
Installation		Unilin Click
Beveled Edge		No
Smoke Density	ASTM E662-06	Pass <450
Static Coefficient of Friction	ASTM C1028	Pass
Chemical Resistance	ASTM F925	Pass
Resistance to light	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction IIC	ASTM E492-09	IIC = 62 dB 6" concrete slab drop ceiling
Calculated Sound Transmission STC	ASTM E413-16	STC = 68 db
Static load	ASTM F970	Pass
Indentation	ASTM F1914	Pass
Phthalate free		Yes

Packaging Information

						
	Pieces	Sf	Lbs	Boxes	Sf	Lbs
Iris 7"x48"	12	28.84	49.8	55	1,586	2,816

Stocked at Hawaii Island HPM Stores



www.hpmhawaii.com/flooring